

G40P

ACTUATORS LINEAR ACTUATOR

HIGHLINE
ELECTRIC



■ DESCRIPTION

- Linear Actuator for opening and closing windows and rooflights.
- Can be used in sync. as a group of 2, 3 or 4 Actuators using SYN Control Unit.
- Choice of 350mm, 550mm or 750mm opening stroke sizes.
- Various fixing brackets available (each sold separately).
- 24V DC version only.
- Supplied complete with 2.5m flex.


■ VOLTAGE

- 24V DC

■ COLOURS

- Silver (Anodised)

■ WINDOW TYPES

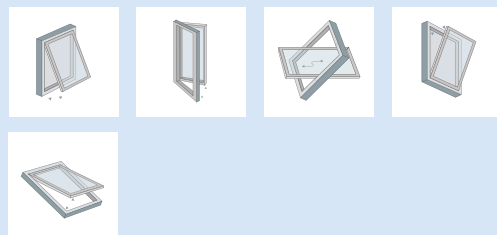

CE Certified and tested in
accordance to EN 12101-10

TECHNICAL DATA

CODE	VOLTAGE	STROKE	FORCE	CURRENT	SPEED	RATING	COLOUR
G40P-350-8-2.5	24V DC	350mm	1570N	4A	13.3mm/s	IP40	SILVER
G40P-550-8-2.5	24V DC	550mm	1570N	4A	13.3mm/s	IP40	SILVER
G40P-750-8-2.5	24V DC	750mm	1570N	4A	13.3mm/s	IP40	SILVER
G40P-350-8-2.5-VDS*	24V DC	350mm	1570N	4A	13.3mm/s	IP40	SILVER
G40P-550-8-2.5-VDS*	24V DC	550mm	1570N	4A	13.3mm/s	IP40	SILVER
G40P-750-8-2.5-VDS*	24V DC	750mm	1570N	4A	13.3mm/s	IP40	SILVER


*Certified and tested in accordance to EN 12101-10

ACCESSORIES

CODE	DESCRIPTION
LB 12-SL5-M5x8	Bearing Pin (Short) with Screw M5x8
LB 12-SL13-M5x16	Bearing Pin with Screw M5x16
AS M8x40-Ø6	Thread M8x40mm, Eye Diameter 6mm
AS M8x40-Ø8	Thread M8x40mm, Eye Diameter 8mm
AS M8x40-Ø10	Thread M8x40mm, Eye Diameter 10mm
AS M8x60-Ø8	Thread M8x60mm, Eye Diameter 8mm
AS M8x60-Ø10	Thread M8x60mm, Eye Diameter 10mm
AS M8x80-Ø8	Thread M8x80mm, Eye Diameter 8mm
AS M8x80-Ø10	Thread M8x80mm, Eye Diameter 10mm
KB-F6	Coupling Bracket with Spring Bolt Ø6mm
KB-KBB 6	Coupling Bracket with Bolt Ø6mm
KB-KBB 8	Coupling Bracket with Bolt Ø8mm
KB-KBB 10	Coupling Bracket with Bolt Ø10mm
MK 24-1-KBB 8	24mm Inner Width, Type 1, with Bolt Ø8mm
MK 47-1	47mm Inner Width, Type 1
MK 47-2	47mm Inner Width, Type 2
MK 47-3	47mm Inner Width, Type 3
MK 47-4	47mm Inner Width, Type 4
MK F-1	Window Bracket Type 1
MK F-B6	Fastening Bolt for AS Ø6mm
MK F-B8	Fastening Bolt for AA Ø8mm
MK W-1	Angle Bracket Type 1

WIRING INSTRUCTIONS

24V DC WIRING

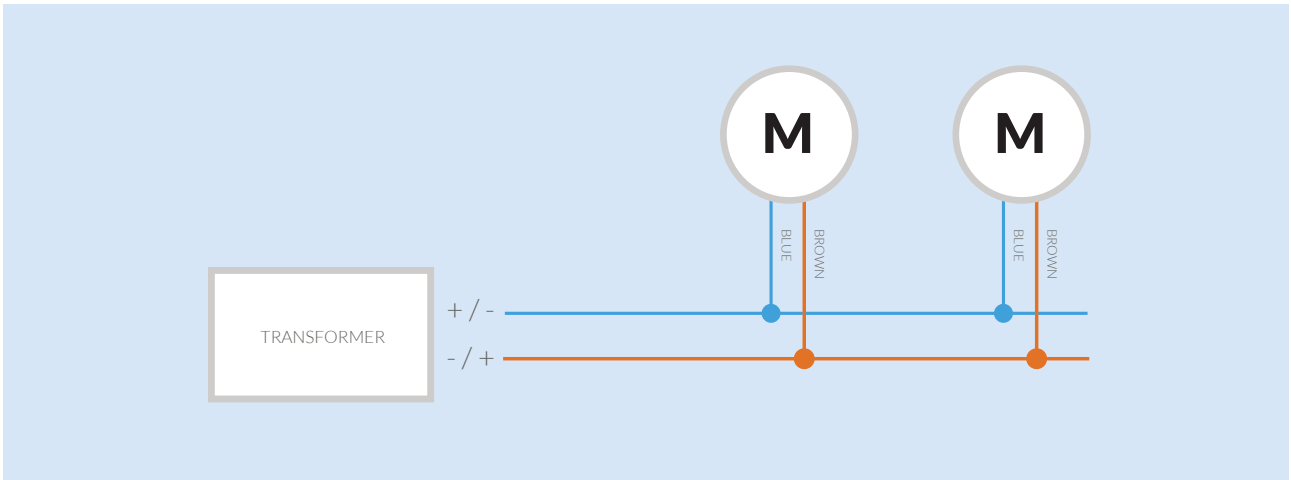

DIMENSIONS

